

ARMARIO GASTRONORM REFRIGERACIÓN

SERIE SPEED AGD-125 / AGD-125 SERIES



CARACTERÍSTICAS GENERALES

- Exterior e interior en acero AISI-304
- Puertas de apertura reversible, con sistema de cierre automático y burlete magnético (permanece abierta al superar los 90° de apertura)
- AGVD doble cristal
- Estantes interiores de alambre en acero plastificado, regulables en altura
- Pies en tubo de acero inox ajustables en altura 125-200 mm
- Cuadro de mandos y rejilla ventilación motor, desmontables
- Unidad condensadora ventilada
- Evaporador sistema tiro forzado, con recubrimiento anticorrosión
- Paro ventiladores tiro forzado al abrir la puerta
- Evaporación automática del agua de descarche
- 40 Kg/m³ density polyurethane insulation, low GWP and zero ODP effect
- Energy efficient digital controller of temperature and defrosts
- Temperatura de trabajo a 32°C ambiente
- Luz interior solo en modelos con puertas de cristal


GENERAL FEATURES

- Exterior and interior steel AISI-304
- Doors with self closing system, blocked opening, magnetic gasket and possibility of changing the opening sense
- AGVD double glazed door
- Shelves made of plasticized steel wire, height adjustable
- AISI -304 18/10 adjustable legs, 125 to 200 mm
- Control panel and engine ventilation grill, removable
- Fan assisted condenser unit
- Fan assisted evaporator, with anticorrosion coating
- Evaporator fan stops when door is opened
- Automatic evaporation of defrost water
- 40 Kg/m³ density polyurethane insulation, low GWP and zero ODP effect
- Energy efficient digital controller of temperature and defrosts
- Operating temperature 32°C ambient
- Interior light only on models with glass doors

Características técnicas y constructivas sujetas a variación sin previo aviso, todas las fotos deben ser consideradas como una referencia
Technical and constructive characteristics subject to variation without prior notice, all photos must be considered as a reference

ARMARIO GASTRONORM REFRIGERACIÓN

SERIE SPEED AGD-125 / AGD-125 SERIES

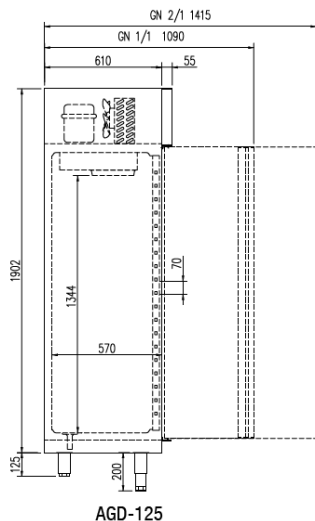

												CCE EEC 2015/ 1094 EN16825	clase climate 2015/1094 EN16825
Modelo Model Modèle	Largo Length Longueur mm	Alto Height Hauteur mm	Fondo Depth Profondeur mm	Rango Range Gamme	Estantes Shelves Étagères	Pares de guías Sets of slides Kit de guides	Capacidad Capacity Exposition L	Tensión monofásica Single phase voltage Tension monophasique	Refrig. Coolant Frigorigène	Potencia Frig. Frig Power Puissance Frig. W	Consumo Consumption Consommation W	Rango Range Gamme	Rango Range Gamme
AGD-125	1250	2075	665	-2°C +8°C	6	6	964	230 V - 50 Hz	R-290	543	416	D	5 40°C 40%
AGVD-125	1250	2075	665	-2°C +8°C	6	6	964	230 V - 50 Hz	R-290	543	434	-	4 30°C 55%

Características técnicas y constructivas sujetas a variación sin previo aviso, todas las fotos deben ser consideradas como una referencia
Technical and constructive characteristics subject to variation without prior notice, all photos must be considered as a reference